

VERNIS ANTAC

BITUMINOUS PRIMER AND WATERPROOFING AGENT

USAGE

VERNIS ANTAC is used as:

- A bituminous based primer on all types of decks (concrete, metal, timber...) before the laying of the waterproofing, to provide a good key for the bitumen and to protect the deck from moisture.
- A basement coating and protection on all civil engineering and underground works : foundation walls, tunnels, conduits, canals, reservoirs, etc.
- A protective coating and protection for external works: timber decks, asbestos cement, concrete, masonry, metal, ceramic, etc.

PRODUCT

VERNIS ANTAC is a cold applied bituminous primer. It contains 52% special bitumen and 48% aromatic solvents.

PERFORMANCE:

Application rate	: from 300 to 350g/m ²
Shelf life	: 1 year
Density at 25°C	: 0.9 to 1.03
Viscosity	: 20" ± 10"
Solid content	: 54%

SAFETY PRECAUTIONS

- VERNIS ANTAC is a flammable product.
- VERNIS ANTAC is also toxic ; fumes should not be inhaled and the product should be used in the open air or in a well ventilated area.
- VERNIS ANTAC can be cleaned with white spirit.

APPLICATION

- The deck must be clean and dry.
- VERNIS ANTAC is cold applied with a spray, roller, brush or scraper.
- It can be applied to all types of decks : masonry, concrete, timber, metal, asbestos, cement, etc.



ADVANTAGES

Rapid drying time:

- Touch dry in 20 minutes
- Dry in 60 minutes
- Fully dry in 24 hours

Provides a very good adhesion between the membrane and the deck.

Provides a good waterproofing coating and protection on underground works.

Packaging

5 litre drum	: 120 drums per pallet
30 litre drum	: 24 drums per pallet





USAGE

IMPRESSION BITUMINEUSE is used as:

- A bituminous based primer on all types of decks (concrete, metal, timber...) before the laying of the waterproofing, to provide a good key for the bitumen and to protect the deck from moisture.
- A basement coating and protection on all civil engineering and underground works : foundation walls, tunnels, conduits, canals, reservoirs, etc.
- A protective coating for external works : timber decks, asbestos cement, concrete, masonry, metal, ceramic, etc.

PRODUCT

IMPRESSION BITUMINEUSE is a cold applied bituminous primer. It contains 52% special bitumen and 48% non-aromatic solvents (including less than 5% aromatic solvent).

PERFORMANCE

Application rate	: from 300 to 350g/m ²
Shelf life	: 1 year
Solid content	: 52% (afnor)
Density at 15°C	: 0.9
Viscosity FORD	: 40" - 60"
Non aromatic solvent	: 48%
Special bitumen	: 52%

SAFETY PRECAUTIONS

- IMPRESSION BITUMINEUSE is a flammable product.
- IMPRESSION BITUMINEUSE is also toxic; fumes should not be inhaled and the product should be used in the open air or in a well ventilated area.
- IMPRESSION BITUMINEUSE can be cleaned with white spirit.

APPLICATION


- The deck must be clean and dry.
- IMPRESSION BITUMINEUSE is cold applied with a spray, roller, brush or scraper.
- It can be applied to all types of deck : masonry, concrete, timber, metal, asbestos, cement, etc.



Due to a policy of continued technical development products supplied may differ slightly from those described in the data sheets - DDUAI Imp. Commerciale

IMPRESSION BITUMINEUSE

BITUMINOUS PRIMER AND WATERPROOFING AGENT

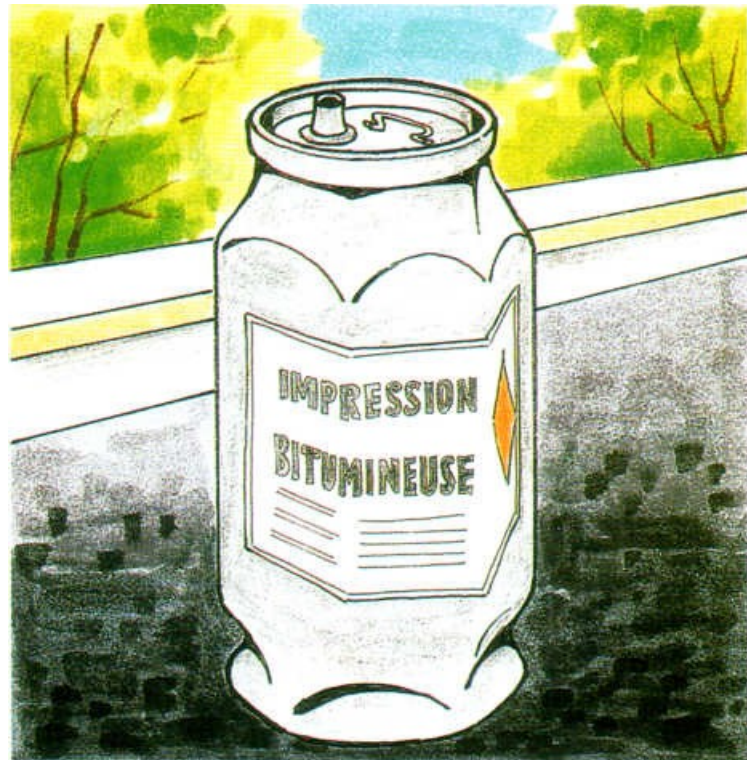

ADVANTAGES

Rapid drying time:

- Touch dry in 1 hour
- Dry in 2 hours
- Fully dry in 24 hours

Provides an excellent bond between the membrane and the deck.

Provides a good waterproofing and protective coating on underground works.

Packaging

30 litre drum : 24 drums per pallet

Axter Ltd
West Road
Ransomes Europark
Ipswich
Suffolk
IP3 9SX

tel: 01473 724 056
fax: 01473 723 263
email: sales@axterltd.co.uk
web: www.axter.co.uk